




**Automatic
PAD CLEAN!**



on ink cup model only


OPTIONAL

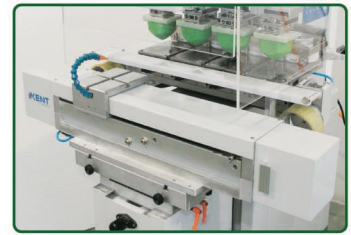


Pneumatic shuttle (2 - 4 color)



DRE-700 digital shuttle
for multi-color

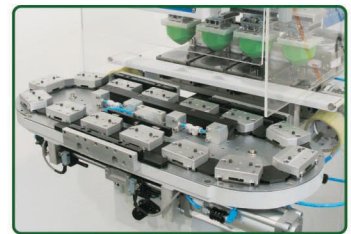

Pneumatic conveyor (4 - 6 color)

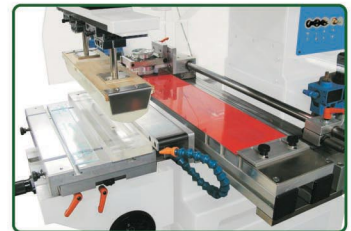

Side way ink cup for long
image printing (SCMIC)

FEATURES

- Microprocessor control, pneumatic operated pad printer
- Light weight, rigid aluminium cast machine frame
- Use sealed ink cup or open ink tray set up
- Compatible with long life, economy of **Green plate**, 10 mm steel plate, thin steel plate and polymer plate
- Dead-on printing plate registration for fast job change
- Membrane switch control panel
- Preprogrammed with 44 stored print options (special program on request)
- Dwell function valve for texture surface printing
- Variable pad delay prior to printing to maximize ink transfer
- Automatic pad clean with programmable cleaning cycle (on ink cup model only)
- Pad stroke & speed adjustment
- Special functions: double ink / print cycles, dwell and delay before print
- Digital pad stroke (DPS) for variable printing depth
- Emergency power shut-off
- Hardened ground steel shaft with impregnated bushing ensure friction-free movement
- High speed and smooth machine operations
- Easily converted to 2, 3, 4 or 5 color machine with shuttle attachment or carousel conveyor

SPECIFICATIONS

Ink cup size :	Ø 60, 70, 90, 130 mm
Plate for ink cup size :	100 x 250, 150 x 300mm
Plate for ink tray size :	100 x 100 - 450 mm, 150 x 100 - 450 mm
Max. speed : (dry cycle) *	1,200 cycles/hr.
Max. pad pressure :	1,870N at 6 bar
Power :	110/220V 60/50Hz 50W
Air consumption :	228 litre/min. (approx.)
Size : L x W x H	974 x 740 x 1,606 mm
Weight :	170 kg (approx.)

* Please note that actual output may be affected by print requirement, ink drying condition, load/unload arrangement, pad stroke speed, pad hardness, production setup, product quality and production control.